

# SURGE SAFE

## Surge Protection Devices

### THE PROTECTION YOU NEED

Global Power Products introduces Surge Safe, surge protection devices that safeguard commercial or residential properties from internally and externally generated power surges.




### MODELS & TECHNICAL SPECIFICATIONS

CCModel Number	Model: 100-SK3W	Model: 100-SM3W	Model: 300-SK4W	Model: 300-SM4W	Model: 310-SM4W 310-SK4W
Applied Voltage	120/240 Vac	120/240 Vac	120/208 Vac	120/208 Vac	277/480 Vac
Service	1-Phase, 3-Wire	1-Phase, 3-Wire	3-Phase, 4-Wire	3-Phase, 4-Wire	3-Phase, 4-Wire
Installation Type	Socket Mount	Surface Mount	Socket Mount	Surface Mount	Surface Mount Socket Mount
MCOV	150 volts –L to N 300 volts – L to L	150 volts –L to N 300 volts – L to L	150 volts L1, L2, L3 to N 300 volts L1-L2, L2-L3, L1-L3	150 volts L1, L2, L3 to N 300 volts L1-L2, L2-L3, L1-L3	320 volts L1, L2, L3 to N 640 volts L1-L2, L2-L3, L1-L3
Fusing	Thermally Protected	Thermally Protected	Thermally Protected	Thermally Protected	Thermally Protected
MOV Surge Current Rating	50kA Per Phase	50kA Per Phase	50kA Per Phase	50kA Per Phase	50kA Per Phase
Clamp Voltage	Min 216 volts @ 1mA Max 264 volts @ 1mA				Min 461 volts @ 1mA Max 563 volts @ 1mA

### Applications & Features

- 7 Year Product Warranty
- Ideal for Residential or Commercial Applications
- Internal or External Installation Options
- Small & Compact Size for Easy Integration
- Specially Packaged TMOV Technology
- Fully Fused and Thermally Protected
- LED Status Indicators for System Protection Status
- Audible Alarm to Indicate Protection is Disrupted

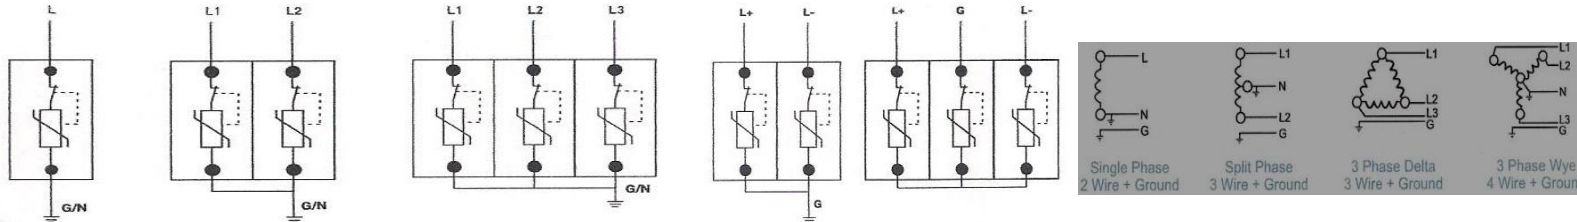

Manufactured By GLOBAL POWER PRODUCTS

225 Arnold Road | Lawrenceville, GA 30044 | Phone: 1-800-886-3837 | Fax: 1-888-886-3837  
E-mail: info@globalpowerproducts.com